

XSP Series

XSPW™ LED Wall Mount Luminaire featuring Cree TrueWhite® Technology

Rev. Date: VersionB V3 07/31/2019

Product Description

The XSPW™ LED wall mount luminaire has a slim, low profile design intended for outdoor wall mounted applications. The rugged lightweight aluminum housing and mounting box are designed for installation over standard single gang J-Boxes and mud ring single gang J-Boxes. The luminaire allows for through-wired or conduit entry from the top, bottom, sides and rear. The housing design is intended specifically for LED technology including a weathertight LED driver compartment and thermal management. Optic design features industry-leading NanoOptic® Precision Delivery Grid™ system in multiple distributions.

Applications: General area and security lighting

Performance Summary

NanoOptic® Precision Delivery Grid™ optic

Assembled in the U.S.A. of U.S. and imported parts

CRI: Minimum 70 CRI (3000K, 4000K & 5700K); 90 CRI (5000K)

CCT: 3000K, 4000K, 5000K, 5700K



Limited Warranty*: 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

* See <http://creelighting.com/warranty> for warranty terms

Accessories

Field-Installed	
Beauty Plate WM-PLT12** - 12" (305mm) Square WM-PLT14** - 14" (356mm) Square - Covers holes left by incumbent wall packs	Hand-Held Remote XA-SENSREM - For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

** Must specify color

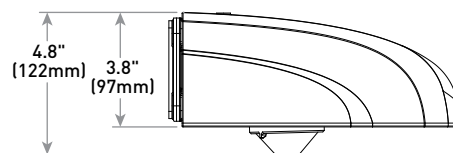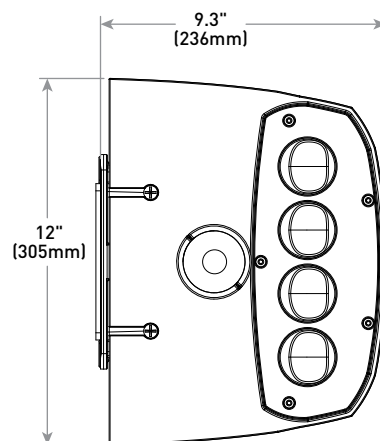

Multi-Level Sensor location
(ordered as an option)

Lumen Package	Weight
2L, 4L, 6L	11.0 lbs. (5.0kg)
8L	11.8 lbs. (5.4kg)

Ordering Information

Example: XSPW-B-WM-2ME-2L-30K-UL-BK

XSPW	B	WM						
Product	Version	Mounting	Optic	Lumen Package*	CCT	Voltage	Color Options	Options
XSPW	B	WM Wall	2ME Type II Medium 3ME Type III Medium 4ME Type IV Medium	2L 2,490 lumens 4L 4,270 lumens 6L 6,100 lumens 8L 8,475 lumens	30K 3000K ~ 70 CRI 40K 4000K ~ 70 CRI 50K 5000K ~ 90 CRI 57K 5700K ~ 70 CRI	UL Universal 120-277V UH Universal 347-480V 34 347V - For use with P option only	BK Black BZ Bronze SV Silver WH White	ML Multi-Level - Refer to ML spec sheet for details - Available with UL voltage only P Button Photocell - Not available with ML or PML option - Available with UL and 34 voltages only PML Programmable Multi-Level - Refer to PML spec sheet for details - Available with UL voltage only

* Lumen Package selection codes identify approximate light output only. Actual lumen output levels may vary depending on CCT and optic selection. Refer to Initial Delivered Lumen tables for specific lumen values



CREE  **LIGHTING**

US: creelighting.com (800) 236-6800

Canada: creelighting-canada.com (800) 473-1234

OSQ Series

OSQ™ LED Area/Flood Luminaire featuring Cree TrueWhite® Technology – Medium

Rev. Date: V25 03/31/2020

Product Description

The OSQ™ Area/Flood luminaire blends extreme optical control, advanced thermal management and modern, clean aesthetics. Built to last, the housing is rugged cast aluminum with an integral, weathertight LED driver compartment. Versatile mounting configurations offer simple installation. Its slim, low-profile design minimizes wind load requirements and blends seamlessly into the site providing even, quality illumination. The 'B' Input power designator is a suitable upgrade for HID applications up to 250 Watt, and the 'K' Input power designator is a suitable upgrade for HID applications up to 400 Watt.

Applications: Parking lots, walkways, campuses, car dealerships, office complexes, tunnels, underpasses, and internal roadways

Performance Summary

Utilizes Cree TrueWhite® Technology on 5000K Luminaires

NanoOptic® Precision Delivery Grid™ optic

Assembled in the U.S.A. of U.S. and imported parts

Initial Delivered Lumens: Up to 17,291

Efficacy: Up to 136 LPW

CRI: Minimum 70 CRI (3000K, 4000K & 5700K); 90 CRI (5000K)

CCT: 3000K, 4000K, 5000K, 5700K

Limited Warranty*: 10 years on luminaire; 10 years on Colorfast DeltaGuard® finish; up to 5 years for Synapse® accessories; 1 year on luminaire accessories

* See <http://creelighting.com/warranty> for warranty terms. For Synapse accessories, consult Synapse spec sheets for details on warranty terms.

Ordering Information

Fully assembled luminaire is composed of two components that must be ordered separately:

Example: **Mount:** OSQ-B-AASV + **Luminaire:** OSQ-A-NM-2ME-B-40K-UL-SV


Mount (Luminaire must be ordered separately)*	
OSQ-	
OSQ-B-AA Adjustable Arm OSQ-DA Direct Arm OSQ-M-TSP Transportation Mount (stainless steel; do not specify color) OSQ-TM Trunnion Mount	Color Options: SV Silver BK Black BZ Bronze WH White

* Reference EPA and pole configuration suitability data beginning on page 9

Luminaire (Mount must be ordered separately)								
OSQ	A	NM						
Product	Version	Mounting	Optic	Input Power Designator	CCT	Voltage	Color Options	Options
OSQ	A	NM No Mount	Asymmetric 2ME* Type II Medium 4ME* Type IV Medium 3ME* Type III Medium Symmetric 5ME Type V Medium 25D 25° Flood 40D 40° Flood 5SH Type V Short 60D 60° Flood WSN Wide Sign 15D 15° Flood	B 86W K 130W Z 53W	30K 3000K, 70 CRI 40K 4000K, 70 CRI 50K 5000K, 90 CRI 57K 5700K, 70 CRI	UL Universal 120-277V UH Universal 347-480V - Available with B & K Input Power Designators only	BK Black BZ Bronze SV Silver WH White	PML Programmable Multi-Level, up to 40' Mounting Height - Refer to PML spec sheet for details - Intended for downlight applications at 0° tilt PML2 Programmable Multi-Level, 10-30' Mounting Height - Refer to PML spec sheet for details - Intended for downlight applications at 0° tilt Q9/Q6/Q5/Q4/Q3/Q2/Q1 Field Adjustable Output - Must select Q9, Q6, Q5, Q4, Q3, Q2, or Q1 - Offers full range adjustability - Refer to pages 11-12 for power and lumen values - Available with B & K Input Power Designators only - Not available with PML or PML2 options R NEMA® 7-Pin Photocell Receptacle - 7-pin receptacle per ANSI C136.41 - Intended for downlight applications with maximum 45° tilt - Factory connected 0-10V dim leads - 18" (457mm) seven-conductor cord exits luminaire - Requires photocell or shorting cap by others RL Rotate Left - LED and optic are rotated to the left - Refer to RR/RL configuration diagram on page 13 for optic directionality RR Rotate Right - LED and optic are rotated to the right - Refer to RR/RL configuration diagram on page 13 for optic directionality

* Available with Backlight Shield when ordered with field-installed accessory (see table above)

DA Mount

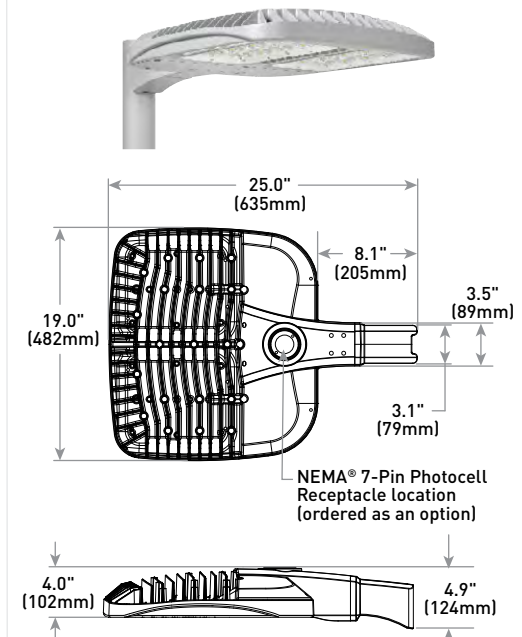

Weight

28.9 lbs. (13.1kg)



US: creelighting.com (800) 236-6800

Canada: creelighting-canada.com (800) 473-1234